











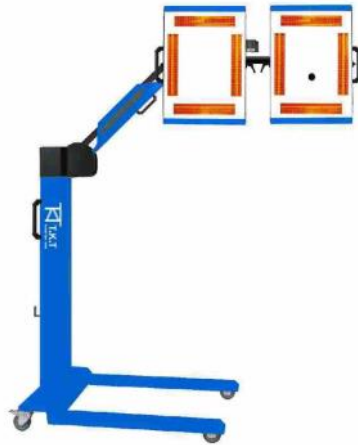






TIR 8

TIR 8S

TIR 8ST



TIR8					Basic functions: pre-heat and full baking		
TIR8S						Basic functions: pre-heat and full baking distance sensor	
TIR8ST							Basic functions plus equipped with ultrasonic distance sensor and temperature controller

Technical Data

Model	TIR 8	TIR8S	TIR8ST
Input voltage(50/60Hz)	400V 3ph	400V 3ph	400V 3ph
Emitter power(W)	12000	12000	12000
Max power(kVA)	12.05	12.05	12.05
Timing range(min)	2X35	2X35	2X35
Temperature(°C)	60-70	60-70	60-70
Net weight (kg)	66.5	67	67

Input voltage can be customized, e.g. 400V 1ph, 220V 3ph...